


WALTHER Wall Socket 110 SL



Easy handling enables fastest wiring time

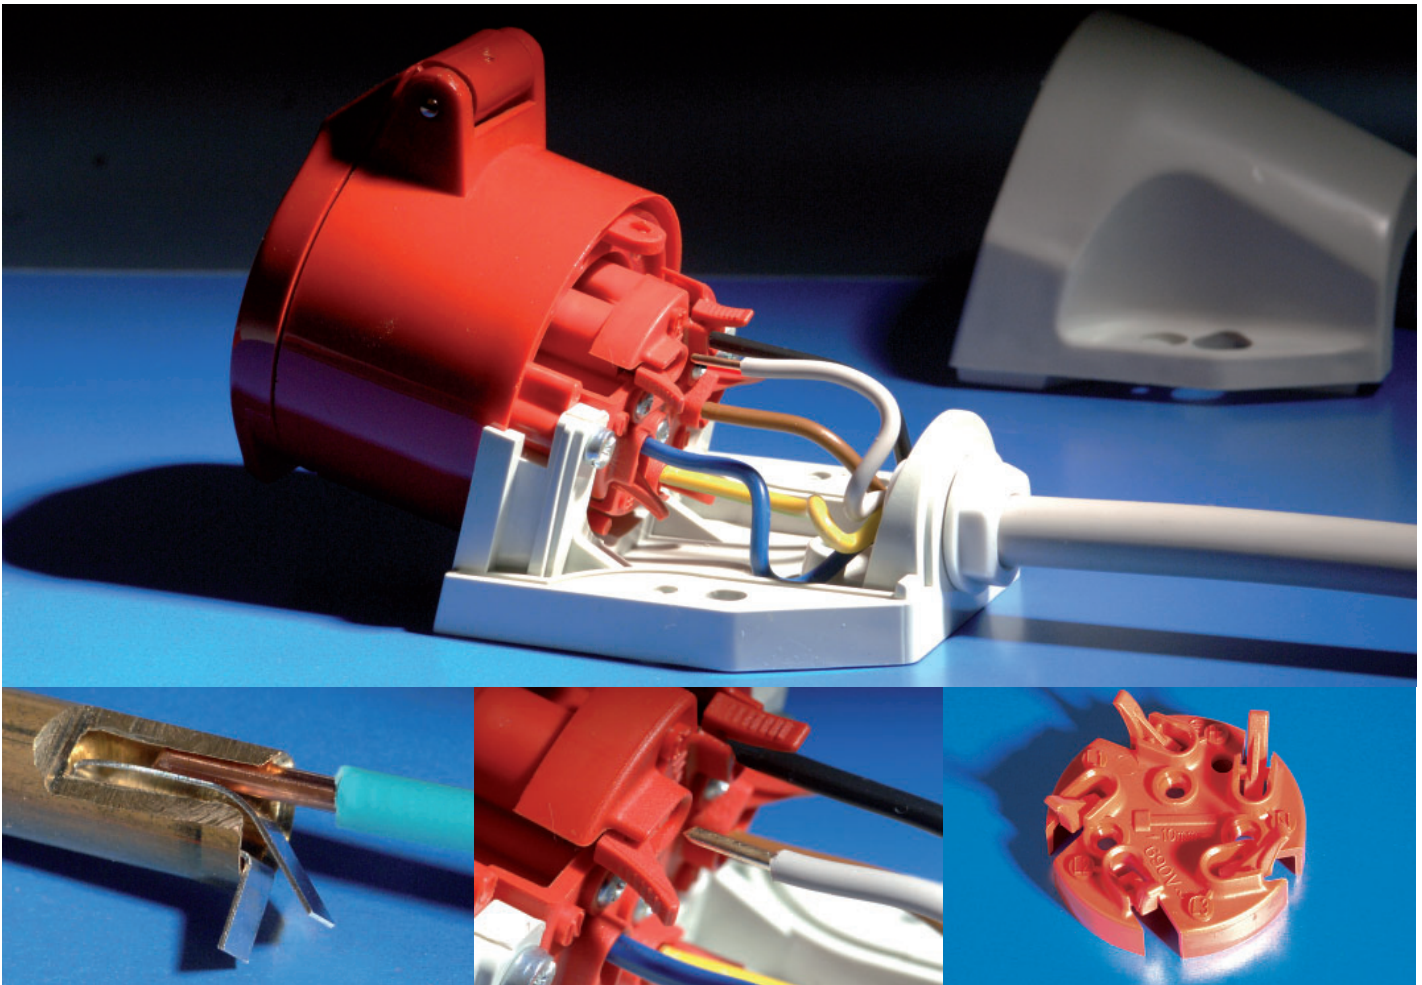

- Safer due to stainless steel clamps
- Even and consistent contact pressure

- Rigid or flexible conductors with wire end ferrule can directly be placed into the terminal - without using a tool.
- Tool-free release mechanism due to ergonomic release lever
- The advantages of push-in connection:
 - easy handling, no tool required
 - extremely short wiring time
 - gastight, vibration resistant and shockproof connection.

All metal parts of the terminal are made of corrosion-resistant materials. The current-carrying contacts consist of high-grade brass alloys. Particularly favourable is the low heat generation owing to the good electrical conductivity.

- Line connection
Required stripping length 10 mm



Solid conductors, cross section 1,5 to 4 mm². Strip wire and you're done.



Flexible conductor, cross section 1 to 2,5 mm² with wire end ferrule, crimped in a gastight manner.



Flexible conductor, cross section 1 to 4 mm², ultrasonically welded.



Specifications



3P+N+E

Ampère

Poles

400 V
50 a. 60 Hz
5pole 6h



Wall socket,
external fixing, 1 top cable entry,
IP 44 ⚠

Part number



Picture 110 SL



16

5

110 SL

10/60

211

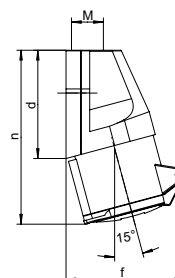

b	60
c	5.3
d	80
e	74
f	90
l	31
n	129
M	20

Wall socket 5 x 16 A with spring clamp connection

Faster fitting thanks to push-in terminals

Update at: www.walther-werke.de

Fax reply: + 49 (0) 63 51 / 475-227

I require:

- Leaflet CEE plugs and sockets _____ pcs.
- Catalogue CEE plugs and sockets _____ pcs.
- Leaflet 'Quick overview' _____ pcs.
- Trade Price List _____ pcs.

If you require some advice please contact us or our local agency.

Walther-Werke · Ferdinand Walther GmbH
Ramsener Str. 6 · D-67304 Eisenberg/Pfalz
Postfach 11 80 · D-67298 Eisenberg/Pfalz
Phone + 49 (0) 63 51 / 4 75-0
Fax + 49 (0) 63 51 / 4 75-227
mail@walther-werke.de
www.walther-werke.de

Sender:

Name, firstname:

Department / function:

Company:

Address:

Zip-code / city:

Phone / fax:

E-mail address: